


Light Blue/ Açık Mavi 5015
CATEGORY 1

Oxide Red/ Oksit Kırmızı 350-4
CATEGORY 2


Dark Blue / Koyu Mavi 5010
CATEGORY 3



Mint Turquoise / Nane Turkuaz 6034

Signal violet / Viöle 4008

Sky Blue / Gök Mavi 5012

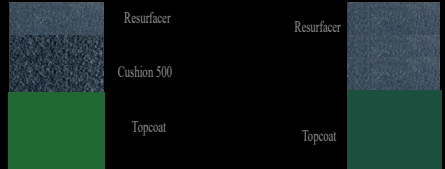

Light Green / Açık Yeşil 6010
CATEGORY 4

Dark Green / Koyu Yeşil 6028
CATEGORY 5



May Green / Bahar Yeşili 6017

Yellow Green / Sarımsı Yeşil 6018

Signal Green / Sinyal Yeşil 6032



Sulfur Yellow / Sülfür Sarı 1016

Traffic Yellow / Trafik Sarı 1023

Bright Red Orange / Canlı Turuncu 2008



Light Grey / Açık Gri 7035

Traffic Grey / Trafik Gri 7042

Iron Grey / Demir Gri 7011



Blue Lilac / mavimsi Lila 4005

Red Lilac / Kırmızımsı Lila 4001

Bright Red / Canlı Kırmızı 3020



Ochre Brown / Sarımsı Kahve 8001

Clay Brown / Kil Kahve 8003

Olive Brown / Zeytin Kahve 8008

BYTECH[®]
BOYA VE YAPI KİMYASALLARI

FLEXITEN ACRYLIC SPORT SYSTEMS



	ASPHALT SURFACE (ASFALT YÜZEYİ)						CONCRETE SURFACE (MERBULİ BETON YÜZEYİ)					
	FLEXITEN BASIC	FLEXITEN 500	FLEXITEN 500	FLEXITEN 500	FLEXITEN 500	FLEXITEN 500	FLEXITEN BASIC	FLEXITEN 500	FLEXITEN 500	FLEXITEN 500	FLEXITEN 500	CONCRETE
Mix Ratio (Oran)	Category 1 FLEXITEN 500 2000 (2000)	Category 2 FLEXITEN 500 2000 (2000)	Category 3 FLEXITEN 500 2000 (2000)	Category 4 FLEXITEN 500 2000 (2000)	Category 5 FLEXITEN 500 2000 (2000)	Category 6 FLEXITEN 500 2000 (2000)	Category 1 FLEXITEN 500 2000 (2000)	Category 2 FLEXITEN 500 2000 (2000)	Category 3 FLEXITEN 500 2000 (2000)	Category 4 FLEXITEN 500 2000 (2000)	Category 5 FLEXITEN 500 2000 (2000)	Category 6 FLEXITEN 500 2000 (2000)
Application Method (Uygulama Yöntemi)	Roller	Roller	Roller	Roller	Roller	Roller	Roller	Roller	Roller	Roller	Roller	Roller
Drying Time (Kuru Olma Süresi)	24h	24h	24h	24h	24h	24h	24h	24h	24h	24h	24h	24h
Weight (Ağırlık)	1.8kg/m ²	1.8kg/m ²	1.8kg/m ²	1.8kg/m ²	1.8kg/m ²	1.8kg/m ²	1.8kg/m ²	1.8kg/m ²	1.8kg/m ²	1.8kg/m ²	1.8kg/m ²	1.8kg/m ²
Notes (Notlar)	FLEXITEN 500 is a two-component system. It is recommended to use FLEXITEN 500 on a clean and dry surface. The application should be done in a well-ventilated area. The drying time may vary depending on the weather conditions.											

BYTECH BOYA VE YAPI KİMYASALLARI
SARILIK YOLU, İTİD. 511,
İstanbul Darı Çarşısı Sarıyazı Bölgesi
Tay Cad. No: 11 01110 Pendik / İSTANBUL
Tel: 0 216 304 22 07 Fax: 0 216 304 22 08
info@bytechboya.com.tr www.bytechboya.com.tr

FLEXITEN[®]
ACRYLIC SYSTEMS

ACRYLIC BASED TENNIS COURT COATING SYSTEMS
AKRİLİK ESASLI TENİS KORT KAPLAMA SİSTEMİ



BYTECH[®]
BOYA VE YAPI KİMYASALLARI